



**Soundproof Everything**  
**Architectural Specification and**  
**Performance Sheet**


MuteX delivers measurable acoustic, thermal, and fire performance in a minimal profile for partitions and ceilings where space, labor, and code compliance matter.

**KEY TECHNICAL SPECIFICATIONS**

Property	Specification	Test Standard
Thickness	0.205" +/- 0.020"	----
Surface Weight	0.24 lb/ft <sup>2</sup>	
Roll Width	60" (5 ft)	
Available Forms	Standard; EZ Stick PSA	
Acoustic (Wall Assembly)	STC approx 32 (2x4 studs; 5/8" gypsum each side)	ASTM E2249
Fire	FSI 120 / SDI 350	ASTM E84
Thermal	Low heat transmission	ASTM C518

**ROI AND COMPARATIVE VALUE**

Category	MuteX	Legacy Solution
Installed Cost	\$3-\$4.50/sf (typical)	\$4-\$6/sf (MLV + extra gypsum)
Labor Time	Single pass (PSA option)	2-3 passes
Weight	0.24 lb/ft <sup>2</sup>	1.0-1.5 lb/ft <sup>2</sup> (MLV)
Depth Impact	Approx 0.205 in	Thicker multi-layer systems

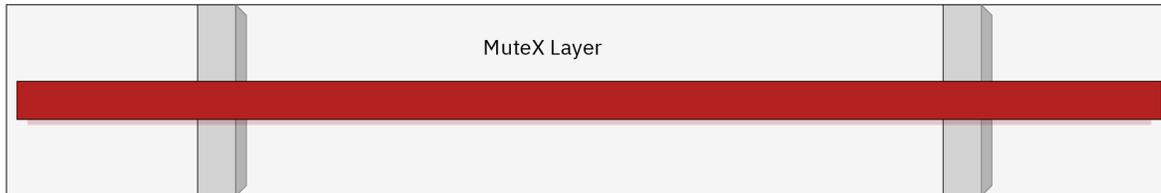

**ASTM Certified**  
 Tested to E84 / E2249 / C518  
 Standards